



# The Complex $\Gamma$ Plane

Resistance  $R$  is a **real** value, thus we can indicate specific resistor values as points on the **real line**:



Likewise, since impedance  $Z$  is a **complex** value, we can indicate specific impedance values as point on a two dimensional **complex impedance plane** :

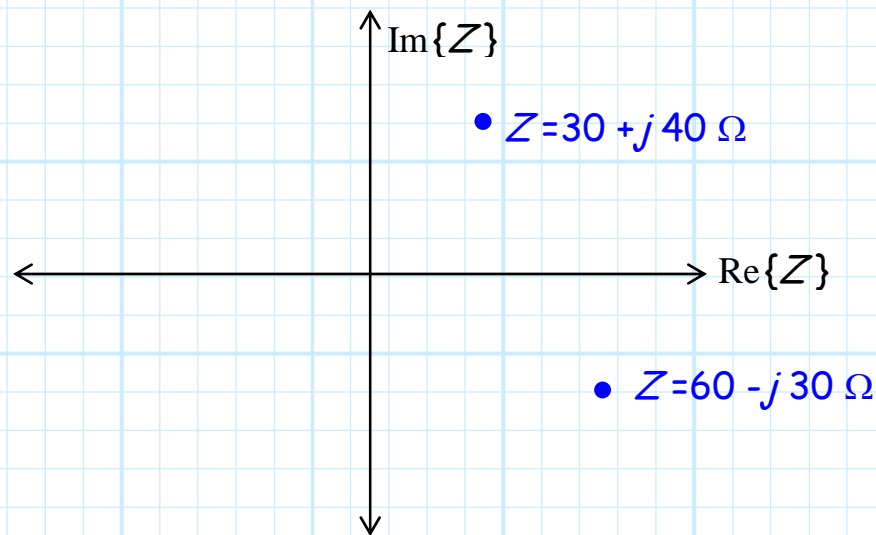


Note each dimension is defined by a single real line:

- \* The **horizontal** line (axis) indicating the **real** component of  $Z$  (i.e.,  $\text{Re}\{Z\}$ ).
- \* The **vertical** line (axis) indicating the **imaginary** component of impedance  $Z$  (i.e.,  $\text{Im}\{Z\}$ ).

The **intersection** of these two lines is the point denoting the impedance  $Z = \mathbf{0}$ .


# Lines and Curves on the Complex Z Plane

- \* Note then that a **vertical line** is formed by the locus of **all** points (impedances) whose **resistive** (i.e., real) component is equal to, say, 75.
- \* Likewise, a **horizontal line** is formed by the locus of **all** points (impedances) whose **reactive** (i.e., imaginary) component is equal to -30.

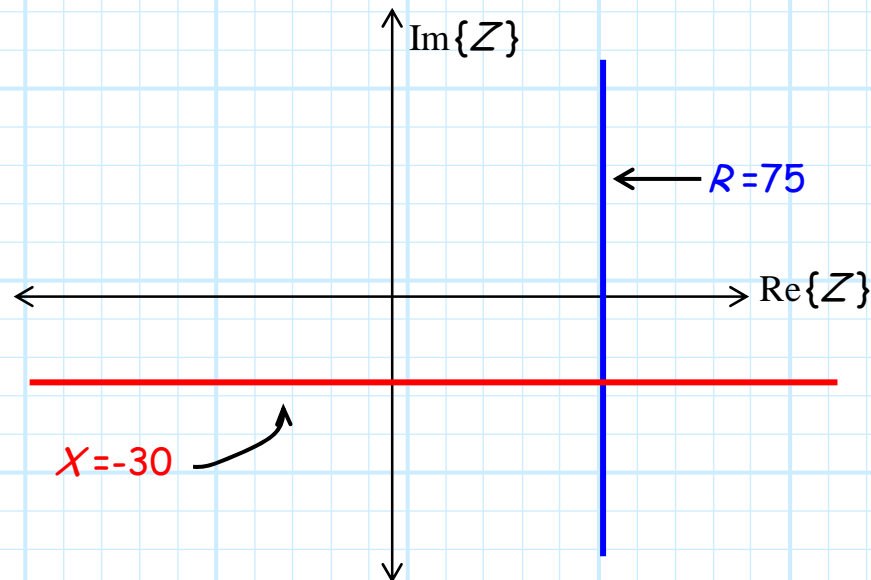


# The Validity Region of the Complex Z Plane

If we assume that the **real** component of **every** impedance is **positive**, then we find that **only the right side** of the plane will be useful for plotting impedance  $Z$ -points on the left side indicate impedances with **negative** resistances!

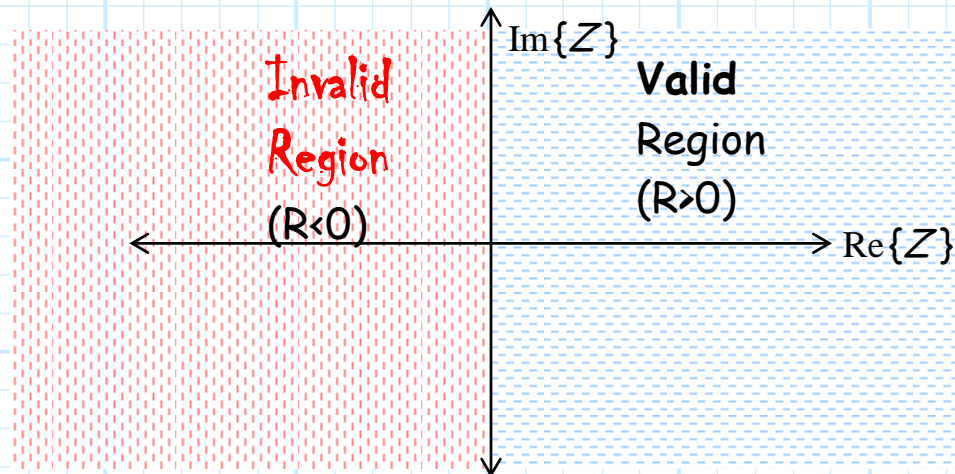

Moreover, we find that common impedances such as  $Z = \infty$  (an open circuit!) **cannot** be plotted, as their points appear an **infinite** distance from the origin.

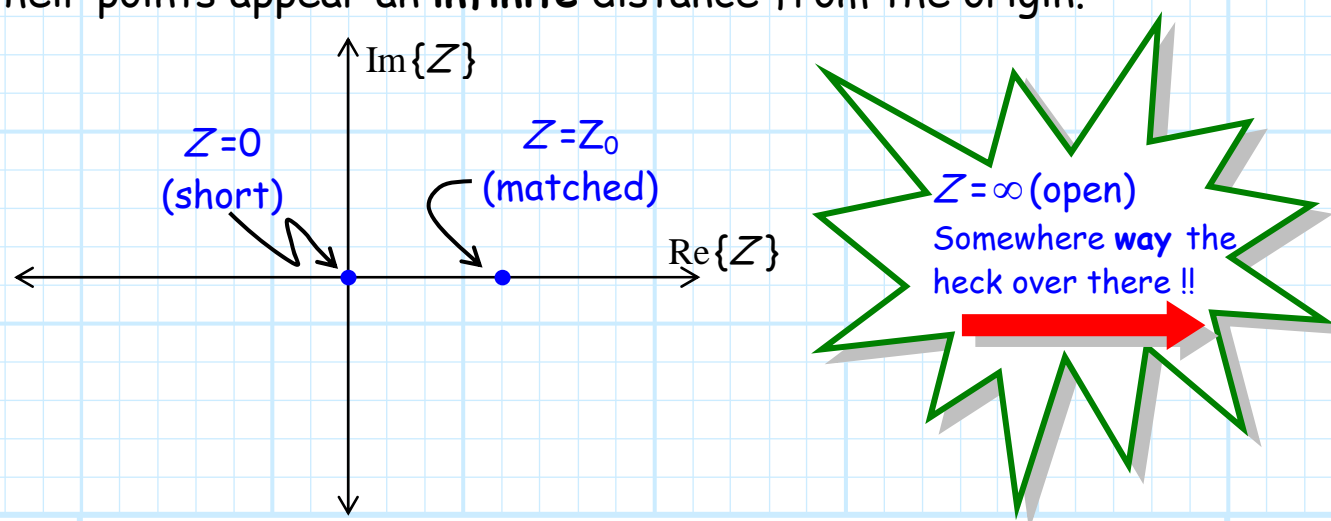


# The Complex $\Gamma$ Plane

**Q:** *Yikes! The complex  $Z$  plane does **not** appear to be a very helpful. Is there some graphical tool that is more useful?*

**A:** Yes! Recall that impedance  $Z$  and reflection coefficient  $\Gamma$  are **equivalent complex values**—if you know **one**, you know the **other**.

We can therefore define a **complex  $\Gamma$  plane** in the same manner that we defined a complex impedance plane. We will find that there are **many** advantages to plotting on the complex  $\Gamma$  plane, as opposed to the complex  $Z$  plane!

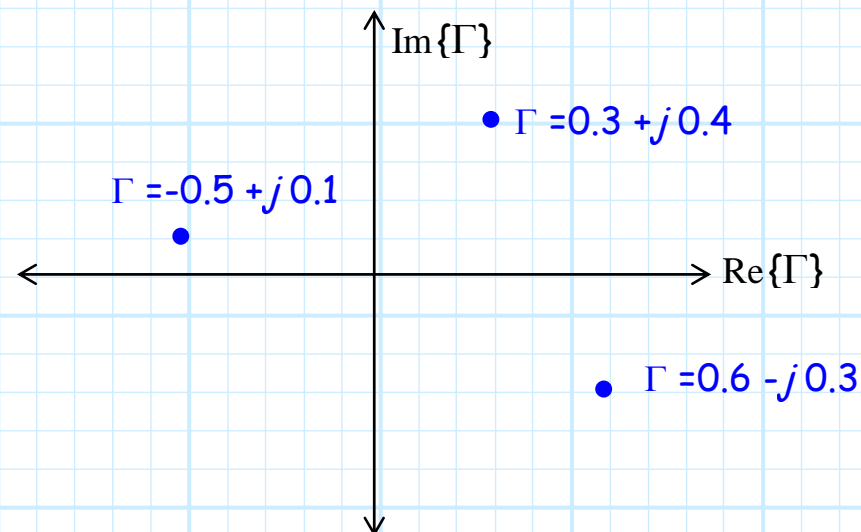


# Lines and Curves on the Complex $\Gamma$ Plane

We can plot points and lines on this complex  $\Gamma$  plane exactly as before:


However, we will find that the utility of the complex  $\Gamma$  plane as a graphical tool becomes apparent **only** when we represent a **complex** reflection coefficient in terms of its **magnitude** ( $|\Gamma|$ ) and **phase** ( $\theta_\Gamma$ ):

$$\Gamma = |\Gamma| e^{j\theta_\Gamma}$$

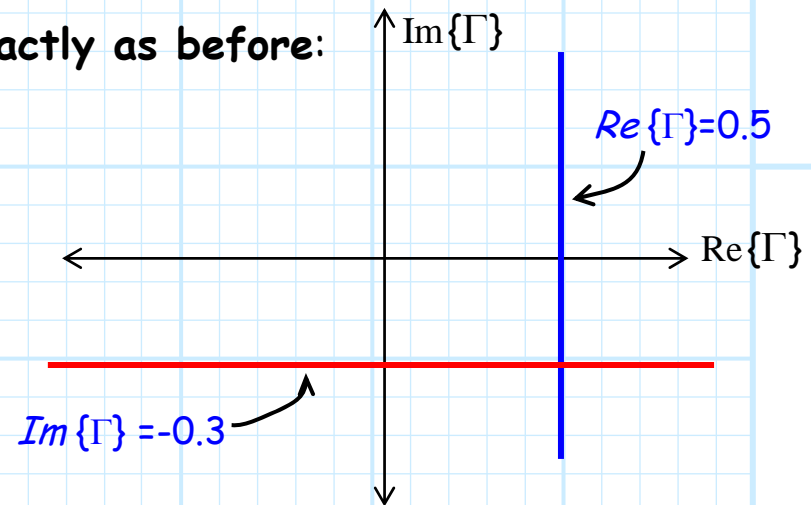

In other words, we express  $\Gamma$  using **polar coordinates**.

Note then that a **circle** is formed by the locus of all points whose **magnitude**  $|\Gamma|$  equal to, say, 0.7. Likewise, a **radial line** is formed by the locus of all points whose **phase**  $\theta_\Gamma$  is equal to  $135^\circ$ .

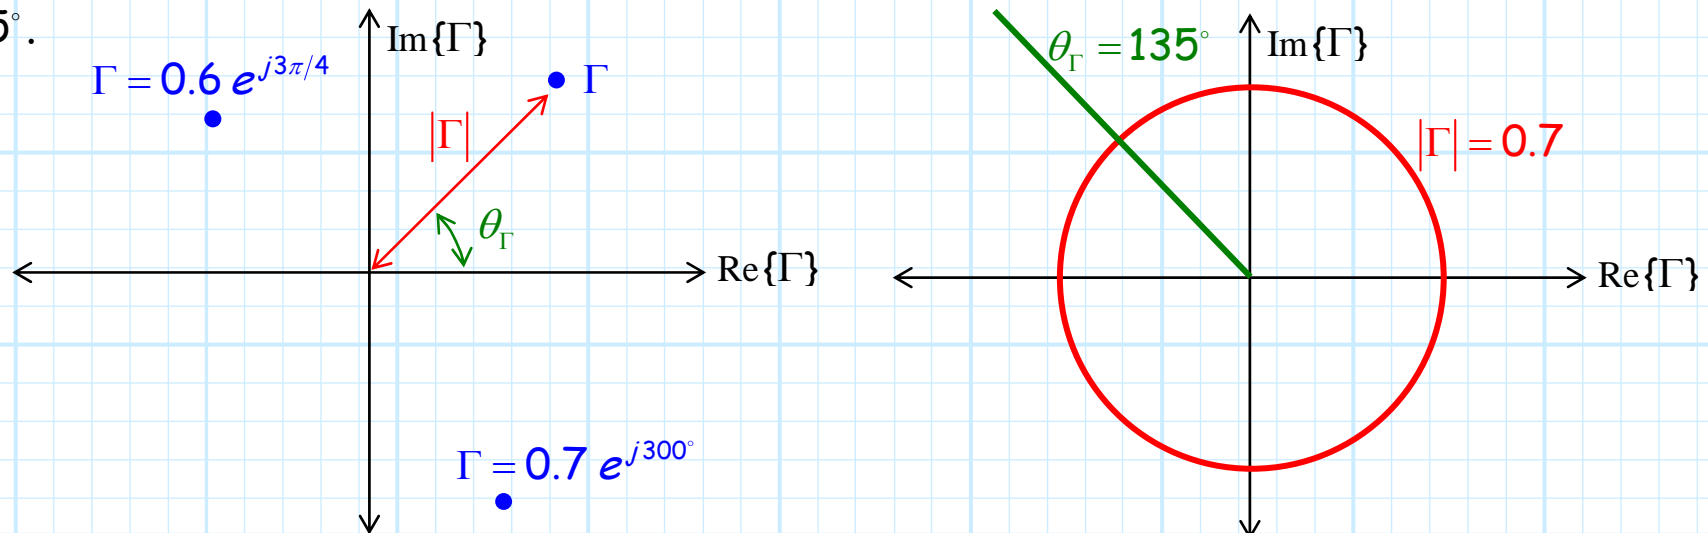

# The Validity Region of the Complex $\Gamma$ Plane


Perhaps the most important aspect of the complex  $\Gamma$  plane is its **validity region**. Recall for the complex  $Z$  plane that this validity region was **unbounded** and **infinite** in extent, such that many important impedances (e.g., open-circuits) could **not** be plotted.

**Q:** *What is the validity region for the complex  $\Gamma$  plane?*

**A:** Recall that we found that for  $\text{Re}\{Z\} > 0$  (i.e., positive resistance), the **magnitude** of the reflection coefficient was **limited**:

$$0 < |\Gamma| < 1$$

Therefore, the **validity region** for the complex  $\Gamma$  plane consists of all points **inside the circle  $|\Gamma| = 1$** --a finite and bounded area!

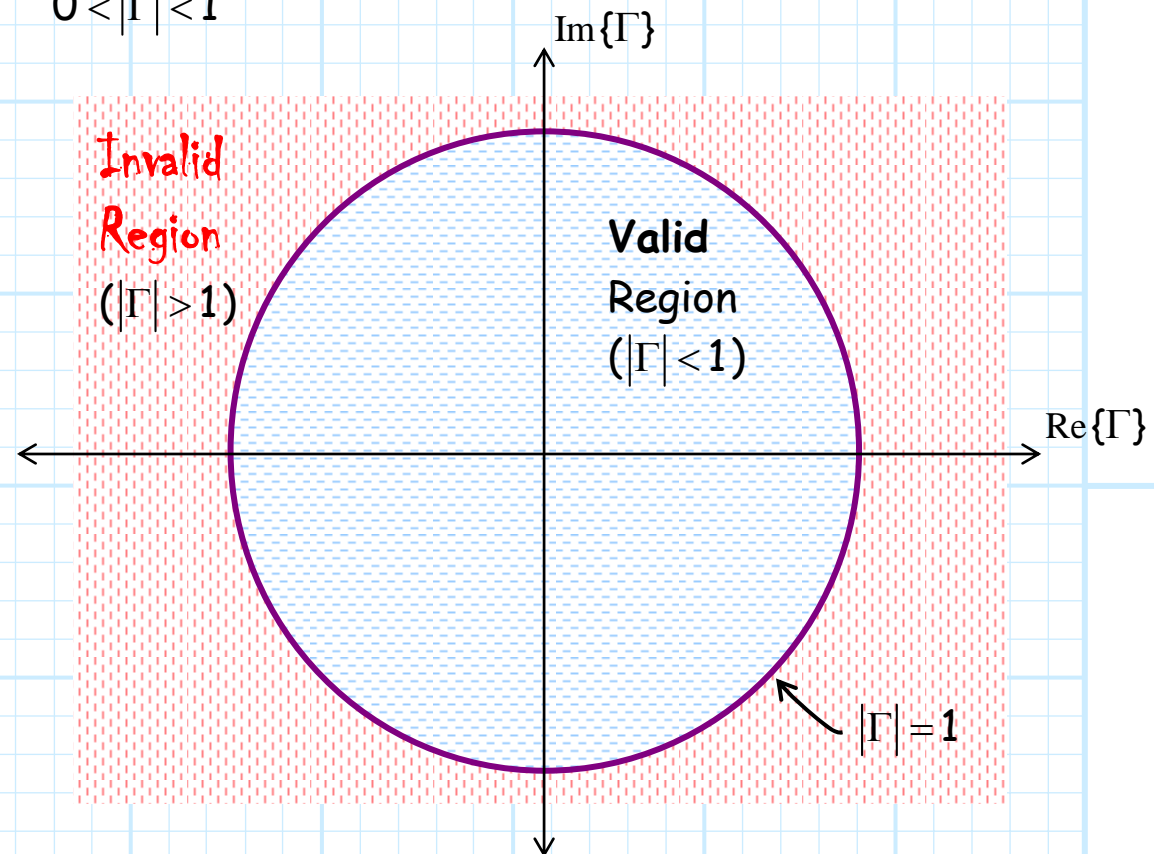

Note that we can plot **all** valid impedances (i.e.,  $R > 0$ ) within this **finite** validity region!

