



EECS 562  
Homework 10

1. The IF frequency of a commercial broadcast FM superheterodyne receiver is 10.7 MHz. Suppose we wish to “tune in” an station FM at 96.2 on the dial.
  - a. What are the two possible frequencies for the local oscillator?
  - b. For each LO frequency in part a, what is the corresponding image frequency?
2. The commercial AM radio station KLWN in Lawrence operates at 1320 kHz. In commercial AM the baseband signal bandwidth is 5 kHz. Commercial AM receivers uses an  $f_{IF} = 455$  kHz. Fill in the blanks below.

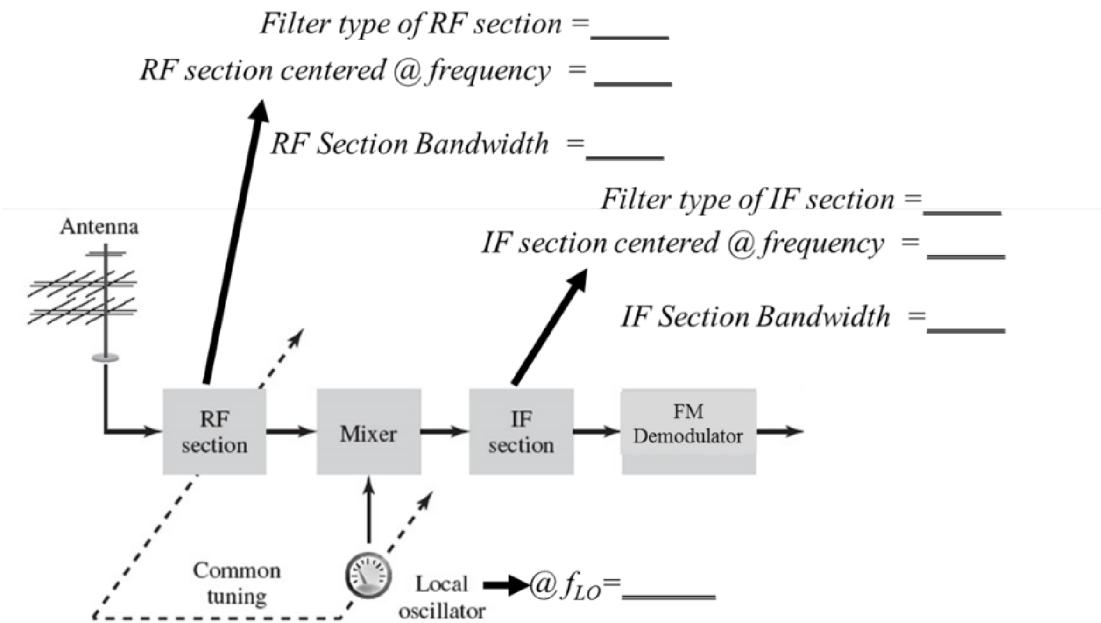

3. A radar operates at  $f_c = 10$  GHz the bandwidth of the baseband radar signal is 10 MHz. The receiver uses an  $f_{IF}=100$  MHz.
  - a. In a superheterodyne radar receiver what frequency is the local oscillator set at to receive this signal?
  - b. What is the bandwidth of the IF filter in this case?
4. A receiver uses a dual conversion receiver, i.e., with two IF sections, as shown below.

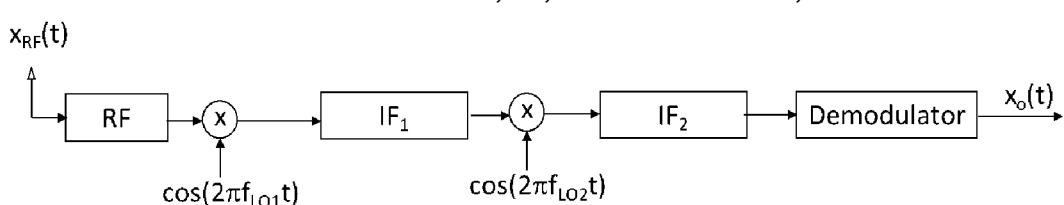

Assume

$$f_c = 900 \text{ MHz}$$

$$f_{IF_1} = 400 \text{ MHz}$$

$$f_{IF_2} = 10.7 \text{ MHz}$$

$$B_{RF} = 200 \text{ kHz}$$

- a. What is the bandwidth of the RF section?
- b. What is the bandwidth of the  $IF_1$  section?
- c. What is the bandwidth of the  $IF_2$  section?
- d. What is  $f_{LO1}$ ?
- e. What is  $f_{LO2}$ ?