


Microstrip Transmission Lines

Microstrip—a quasi-TEM transmission line!

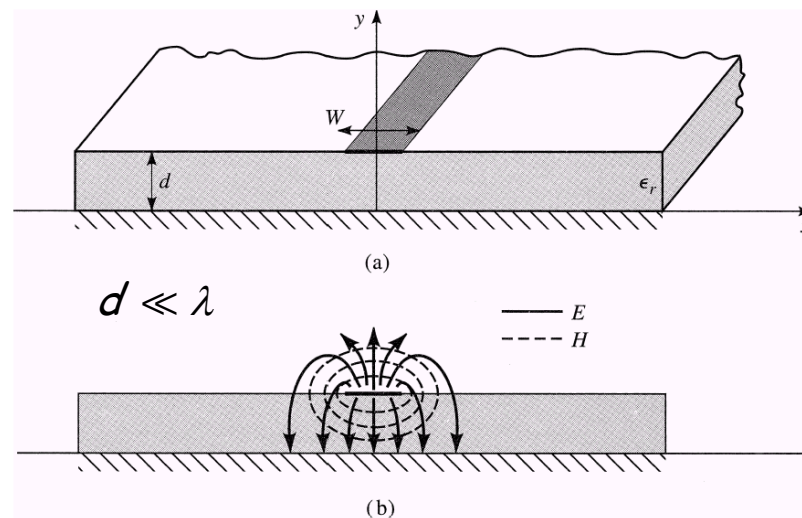

There are no **exact** analytic solutions for a microstrip transmission line—they must be **numerically** analyzed. However, we can use those results to form an analytic **approximation** of microstrip transmission line behavior.

The propagation constant β of a microstrip line is related to its **effective relative dielectric** ϵ_e :

$$\beta = \frac{\omega}{c} \sqrt{\epsilon_e}$$

where:

$$\epsilon_e = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \frac{1}{\sqrt{1 + 12 d/W}}$$

Note that $\epsilon_e \neq \epsilon_r$; in fact, $1 < \epsilon_e < \epsilon_r$.

Likewise, the characteristic impedance of a microstrip line is **approximately**:

$$Z_0 = \begin{cases} \frac{60}{\sqrt{\epsilon_e}} \ln \left(\frac{8d}{W} + \frac{W}{4d} \right) & \text{for } W/d \leq 1 \\ \frac{120\pi}{\sqrt{\epsilon_e} \left[W/d + 1.393 + 0.667 \ln(W/d + 1.444) \right]} & \text{for } W/d \geq 1 \end{cases}$$

Note that both transmission line parameters are expressed in terms of the **unitless** parameter W/d , a coefficient value **analogous** to the ratio a/b used to describe **coaxial** transmission line geometry.

From the standpoint of microstrip **design**, we typically want to determine the value W/d for a desired value Z_0 (i.e., the **inverse** of the equation above). This result is provided by equation 3.197 of your **textbook**.